



Cat[®] CST65

GEARBOX

Specifications

Typical Application

Chain Type Longwall Machinery like Armored Face Conveyors (AFC)

Maximum Output Torque (for 3 sec) T_{max} [N·m]

KP-65 CST/P-65 CST 650 000 N·m 479,415 lb/ft

Rated Power P

Ratio i [-]	Rated Power P (n = 1,480 rpm)	Rated Power P (n = 1,800 rpm)
28	1200 kW	1,958 hp
33	1200 kW	1,958 hp
39	1000 kW	1,632 hp
45	900 kW	1,468 hp
50	800 kW	1,305 hp

Dimensions

KP-65 CST

Length	2910 mm	114.6 in
Width	1530 mm	60.2 in
Height	1060 mm	41.7 in

P-65 CST

Length	1887 mm	74.3 in
Width	1120 mm	44.1 in
Height	1060 mm	41.7 in

Requirements of Cooling Water

Required Cooling Water Quantity	25 L/min	6.6 gal/min
Maximum Water Inlet Temperature	25° C/298.15 K	77° F/298.15 K

Capacity

KP-65 CST

Oil Quantity	800 L	211 gal
Gearbox Weight (without oil)	10 880 kg	23,980 lb


P-65 CST

Oil Quantity	500 L	132 gal
Gearbox Weight (without oil)	7300 kg	16,094 lb

Shaft Design

Input Shaft (cylindrical) DIN 5480-W 120×4

Output Shaft with Internal Tothing DIN 5480-N 320×10

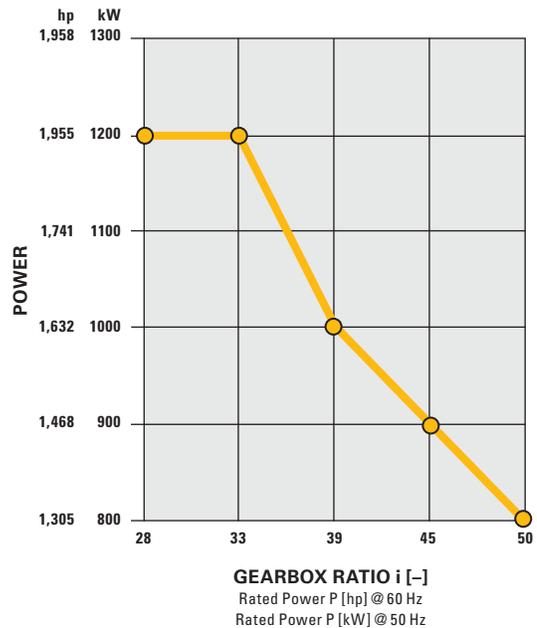

CST65 Gearbox

For more complete information on Cat® products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2017 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, “Caterpillar Yellow” and the “Power Edge” trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ6876-01 (01-2017)
Replaces AEHQ6876

