CAT[®] SKID STEER LOADER, MULTI TERRAIN LOADER AND COMPACT TRACK LOADER ATTACHMENT OPTIONS

For more information, visit petersoncat.com/ products/new/attachments or contact us today.



LET'S DO THE WORK.

AEXQ1855-04 September 2016

P45_0419 © 2016 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. LET'S DO THE WORK."



SPEND LESS AND EARN MORE.

Equip one machine to do it all.

Invest in what you already own – equip your machine with a Cat[®] attachment and it becomes so much more. Our attachments are engineered, tuned and integrated into each Cat machine model. They promise to minimize stress and optimize performance. Browse our lineup and find the tools you need to get work done faster than ever before.



AUGERS



.

Tree Bit

Bolt-On Rock Head Bit

Bore with better efficiency.

Our augers offer different speed and torque options for work in a variety of soils. We've engineered their speed to extract soil efficiently and their torque to prevent stalling in dense ground. Select from a range of auger bits.

Specifications

Attachment Models	Machine Models		-	Drive Shaft Torque @ Max Pressure			e Method
			N	lm	(lb ft)		
A14B	All b	elow	2	304	(1700)	Dire	ct Drive
A19B	All b	elow	4	122	(3042)	Sing	le Planetary
A26B*	All D	Series	6	826	(5034)	Doul	ole Planetary
*Requires hig	h flow o	or high flow X	PS option on ma	achine.			
Skid Steer, I	Multi T	errain and (Compact Trac	k Loaders			
216B3 2	36D	246D	259D	2720	2 XHP	287D	297D2 XHP
	39D	249D	262D	2770		289D	299D2
232D 2	42D	257D	272D2	2790)	297D2	299D2 XHP

BACKHOES



Excavate more easily.

Control the Cat backhoe from inside the cab — we've engineered it so you can dig and reposition all from the operator's seat. Our side-shift feature allows you to work close to walls for widening trenches, exposing brick ledges and backfilling. Get optional auxiliary hydraulic lines for adding hammers, augers, ditch cleaning buckets, thumbs or vibratory plate compactors.

Attachment Models	Machine Mo	dels	Bucket	Breakout Forc	e Dig Do	Dig Depth						
			kg	(lb)	mm	(in)						
BH150	All below		3241	(7146)	3074	(121)						
BH160	246D, 262D-2	99D2 XHP	3241	(7146)	3074	(121)						
Skid Steer, I	Skid Steer, Multi Terrain and Compact Track Loaders											
226D 2	36D 246D 39D 249D 42D 257D	259 262 272	D	272D2 XHP 277D 279D	287D 289D 297D2	297D2 XHP 299D2 299D2 XHP						

BALE SPEARS



BALE GRABS



Make moving bales simple.

Select from our single or dual spear design, both ideal for removing or placing bales in a stack. Our single-spear models include stabilizers and dual-spear models feature a high backrest for large loads. Spears are easily replaced and frames offer a bolt-on step.

Specifications

Attachme Models	Attachment Models		Machine Models	Overall \			Veight	
				mm	(in)	kg	(lb)	
990 mm (3	89 in) Singl	e Tine	All below	1285	(51)	70	(154)	
1245 mm	(49 in) Sing	le Tine	All below	1285	(51)	72	(158)	
990 mm (3	89 in) Dual	Tine	All below	1407	(55)	118	(260)	
1245 mm	1245 mm (49 in) Dual Tine		All below	1407	(55)	121	(266)	
Skid Ste	er, Multi 1	errain and	l Compact Track Loa	aders				
216B3	236D	246D	259D	272D2 XHP	287D		297D2 XHP	
226D	239D	249D	262D	277D	289D		299D2	
232D	242D	257D	272D2	279D	297D2		299D2 XHP	

Grab baled material with greater precision.

Use our bale grabs for grasping, carrying and placing large baled materials. Its tubular arms eliminate damage to the wrapping or bale itself, while its rigid, high-strength steel frame extends working life. This attachment also comes with hardened pins and easily accessible grease points for greater productivity and a bolt-on step for safer cab access.

Attachme Models	ent	Machine Models	Weight		Maxin Openii	num ng Width		l Width ed Arms
			kg	(lb)	mm	(in)	mm	(in)
1803 mm	(71 in)	All below	261	(575)	1803	(71)	940	(37)
2133 mm	(84 in)	All below	263	(580)	2133	(84)	918	(36)
Skid Ste	er, Multi	Terrain and Co	ompact Trac	k Loader:	S			
216B3	236D	246D	259D	272	D2 XHP	287D	29	7D2 XHP
226D	239D	249D	262D	277	-	289D		9D2
232D	242D	257D	272D2	279	D	297D2	29	9D2 XHP

BLADES



Material movement made easy.

Our blades are made for moving and smoothing materials in multiple applications. Tilt the blade for aggressive cutting of material or pitch the blade back to spread material. Blades have replaceable, reversible cutting edges.

Specifications

Attachme Models	ent Machine Models		Width			Height		
				mm	(in)		mm	(in)
Angle	All	below		1829-2134	(72-84)		614	(24)
Dozer	All	below		2002-2342	(79-92)		619	(24)
Skid Ste	er, Multi T	errain and Co	ompact T	rack Load	ers			
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	27	72D2 XHP 77D 79D	287D 289D 297D2		297D2 XHP 299D2 299D2 XHP

BROOMS



Do some serious sweeping.

Cat brooms are built for even-pressured sweeping for the most thorough debris removal. Our angle brooms are made for moving and windrowing debris aside. Our pickup brooms gather debris as they work and feature a gutter brush for building-base and close-to-the-curb cleaning. And our utility brooms gather light debris, ideal for factory floors. From collection hoppers to dust control features, we offer options for every application.

Attachment Models		Ma	chine Models	Sweeping	y Width	Brush	Brush Diameter		
				mm	(in)	mm	(in)		
Angle	BA118	BC All I	oelow	2119	(83)	815	(32)		
Pickup	BP11	5C All I	oelow	1524	(60)	660	(26)		
	BP118	3C 236	D-299D2 XHP	1829	(72)	660	(26)		
Utility	BU11	5 All I	oelow	1510	(59)	660	(26)		
	BU118	3 236	D-299D2 XHP	1865	(73)	660	(26)		
Skid Stee	er, Multi T	errain and	Compact Track	Loaders					
216B3	236D	246D	259D	272D2 XHP	287D	2	297D2 XHP		
226D	239D	249D	262D	277D	289D		299D2		
232D	242D	257D	272D2	279D	297D2	2	299D2 XHP		

BRUSHCUTTERS



Efficiently remove overgrowth.

High-speed cutting makes it easy to reduce brush and small trees in open areas, on medians and around utilities. And with three lift points, replacing blades is easy too. All brushcutter models are designed with a reinforced frame for protection from flying debris.

Specifications

Attachment Models	Machine Models			Working Width		Tip Speed	l Unit V	Unit Weight	
				mm	(in)	fpm	kg	(Ib)	
BR160	216B3 239D,	3, 226D, 232D 249D),	1524	(60)	13080-183	60 431	(950)	
BR166	All ex 239D,	cept 226D, 2 249D	232D,	1676	(66)	10270-144	20 476	(1050)	
BR172	All ex 239D,	cept 226D, 2 249D	232D,	1829	(72)	11210-157	30 499	(1100)	
BR272*	226D,	232D, 239D,	249D	1829	(72)	14940-196	60 508	(1120)	
BR378*	246D,	262D-299D2	2 XHP	1981	(78)	13700-199	70 535	(1180)	
*Requires hig	h flow or	high flow XP	S option	on mach	ine. Operat	es in high flov	v XPS on XHP ı	machines.	
Skid Steer,	Multi T	errain and C	Compac	t Track	Loaders				
226D 2	236D 239D 242D	246D 249D 257D	259 262 272	-	272D2 277D 279D	XHP 287[289] 297[) 2	297D2 XHP 299D2 299D2 XHP	

BUCKETS



Move more material in less time.

The shape of our buckets improves digging, loading and material retention. Compared to most competition, we have more capacity per every inch of width. And each is made of high-strength, tempered steel. Select from a range of bucket teeth.

Attachment Models	Machine Models	Width Range	9	Capacity Ra	nge
		mm	(in)	m ³	(yd³)
Dirt	All below	1372-1981	(54-78)	0.3-0.44	(0.39-0.57)
General Purpose	All below	1524-2134	(60-84)	0.36-0.63	(0.47-0.82)
Light Material	All below	1829-2438	(72-96)	0.69-0.93	(0.9-1.22)
Material Handling	All below	2134-2591	(84-102)	1.07-1.33	(1.40-1.74)
Multi-Purpose	All below	1524-2134	(60-84)	0.3-0.43	(0.39-0.56)
Utility	All below	1524-1829	(60-72)	0.43-0.52	(0.56-0.67)
		Width Range)	Jaw Openin	g
		mm	(in)	mm	(in)
Industrial Grapple	All below	1524-1981	(60-78)	1016	(40)
Utility Grapple	All below	1676/1829	(66/72)	902	(35.5)
Skid Steer, Multi	Ferrain and C	ompact Track L	oaders		
216B3 236D 226D 239D	246D 249D	259D 262D	272D2 XHP 277D	287D 289D	297D2 XHP 299D2

COLD PLANERS

Mill asphalt and concrete quickly.

Our cold planers are made to smooth imperfections and remove deteriorated pavement or paint where dedicated planers can't. A hydraulic side-shift feature allows for planing close to curbs, walls and other obstructions. And our self-leveling technology ensures consistent ground contact.



Specifications

Attachment Models	Machine Models	Drum Wi	dth	Number of Bits
		mm	(in)	(Conical)
PC104B	All below	350	(14)	42
PC205B*	All below	450	(18)	48
PC305B**	All D Series	450	(18)	48
PC306B**	All D Series	600	(24)	60
PC306B XD	272D2-299D2 XHP	600	(24)	48
PC310B***	246D, 262D-299D2 XHP	1000	(40)	78
PC310B XD	287D-299D2 XHP	1000	(40)	66
PC408B	272D2 XHP, 297D2 XHP, 299D2 XHP	750	(30)	60
PC412B	272D2 XHP, 297D2 XHP, 299D2 XHP	1200	(47)	90

*Requires high flow option on machine. Operates in standard flow on high flow XPS or XHP machines. **Requires high flow or high flow XPS option on machine. Operates in high flow XPS on XHP machines. ***Requires high flow XPS option on machine. Operates in high flow XPS on XHP machines.

Skid Steer, Multi Terrain and Compact Track Loaders

216B3 226D	236D 239D	246D 249D	259D 262D	272D2 XHP 277D	289D	297D2 XHP 299D2
232D	242D	257D	272D2	279D	297D2	299D2 XHP

FORKS



Transport more materials.

From stacked feedbags to loose straw, load and transport in less time. Our pallet forks were specifically designed to transport palletized items. Our utility forks are ideal for pierceable materials like dried livestock waste or straw. Optional grapples improve material retention so work is always neat and always efficient.

Attachment Models		Machine Models	Tine Length	Tine Length		Fork Tine Width			
			mm	(in)	mm	(in)			
Pallet		All below	910-1220	(36-48)	100	(4)			
			Width		Exposed	l Fork Tine Length			
			mm	(in)	mm	(in)			
Utility		All below	1676/1829	(66/72)	627	(24.7)			
Utility Grap	ople	All below	1676/1829	(66/72)	627	(24.7)			
Industrial (Grapple	All below	1676/1829	(66/72)	559	(22)			
Skid Steer, Multi Terrain and Compact Track Loaders									
216B3	236D	246D	259D	272D2 XHP	287D	297D2 XHP			
	239D	249D	262D	277D	289D	299D2			
226D	2000	2.02							

HAMMERS



Separate the toughest surfaces.

Our hammers were designed for hard hits, reducing rock and concrete materials. Each features an automatic shut-off and buffering system to reduce machine vibrations. And some of our hammers are fully enclosed to suppress noise.

Specifications

Attachme Models		Machine Models	Operating Weight**		Blow Rate	Tool Diameter	
			kg	(lb)	blows/min	mm	(in)
H55E*/H55	ōEs A	All below	220-345	(485-761)	600-1680	58	(2.28)
Flat top ar	H65E/H65Es All below 260-390 (573-860) 720-1740 68 (2.68) *Flat top and pin-on models available **Includes hammers, standard tool and mounting bracket						
Skid Ste	er, Multi 1	Terrain and C	ompact Trac	ck Loaders			
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	272D2) 277D 279D	(HP 287D 289D 297D2	29	97D2 XHP 99D2 99D2 XHP

MATERIAL HANDLING ARMS



Carry and place with precision.

Safely transport non-uniform materials, as well as plants, trees or shrubs. Cat material handling arms offer two lifting points, each set up to hold a locking hook capable of swiveling 360 degrees.

Attachme Model	nt	Machine Mode	ls Width	w/Side Step	Load Length (end point)		
			mm	(in)	mm	(in)	
Fixed Len	gth	All below	1309	(52)	768	(30)	
Skid Stee	er, Mult	ti Terrain and Co	mpact Track L	oaders			
216B3	236D		259D	272D2 XHP	287D	297D2 XHP	
226D 232D	239D 242D	249D 257D	262D 272D2	277D 279D	289D 297D2	299D2 299D2 XHP	
2020	2420	20,0		2700	20702	20082711	

MULCHERS

Rapidly reduce vegetation.

Our mulchers can shred any underbrush, sapling, shrub or tree with a 200 mm (8 in) diameter or less. They're engineered to minimize stalling and improve recovery speed for consistent mulching power.



Specifications

Attachment Models	Machine Mode	ls Wo Wid	rking Ith	Drum Speed	Unit W	Unit Weight	
		mm	(in)	rpm	kg	(lb)	
HM112C	216B3, 226D, 23 239D, 249D	2D, 124	0 (49)	2670-3070	763	(1682)	
HM115C	236D, 242D, 246 257D-299D2 XHI	,	0 (58)	2570-2940	818	(1803)	
HM215C*	226D-242D, 2491	D-259D 148	0 (58)	2480-3020	818	(1803)	
HM315C**	246D, 262D-299I	02 XHP 158	2 (62)	2140-2230	1342	(2959)	
HM415C	272D2 XHP, 297[299D2 XHP	02 XHP, 158	2 (62)	2140-2210	1342	(2959)	
HM418C	272D2 XHP, 297[299D2 XHP	02 XHP, 182	2 (72)	2140-2210	1450	(3197)	
	ine to have high flow flow XPS option on i		ure option.				
Skid Steer, N	Iulti Terrain and C	ompact Track	Loaders				
226D 23	6D 246D 9D 249D 2D 257D	259D 262D 272D2	272D2 277D 279D	2 XHP 287D 289D 297D2	2	97D2 XHP 99D2 99D2 XHP	

RAKES



Sort with speed.

Cat rakes come in a range of land-clearing options. Our landscape and power box options use hardened teeth to pulverize, aerate, level and condition soil. The landscape rake collects debris in a hopper and the power box rakes at an angle, windrowing debris for easy cleanup. With upper and lower tines, and an open-bottom design, our industrial grapple rake gathers bigger materials.

Attachment Models		Machine Models	Jaw Ope	ning	Width	Width	
			mm	(in)	mm	(in)	
Industrial Grapple R	ake	All below	940	(37)	1829/2134	(72/84)	
			Working	Width	Bucket Ca	pacity	
		Machine Models	mm	(in)	m ³	(yd³)	
Landscape Rakes	LR15B	All below	1576	(62)	0.3	(0.39)	
	LR18B	239D, 246D-299D2 XHP	1883	(74)	0.34	(0.44)	
			Drum Wi	dth	Max Angling (right or left)		
		Machine Models	mm	(in)	degrees		
Power Box Rakes	PR172	All below	1829	(72)	20		
	PR184	All below	2134	(84)	20		
	PR190	All below	2286	(90)	20		
Skid Steer, Multi	Terrain an	d Compact Track Lo	aders				
216B3 236D	246D	259D	272D2 XHP	287D	297	D2 XHP	
	249D	262D	277D	289D	299	D2	
226D 239D	2100						

SHEARS



SILAGE DEFACERS



Minimize metal.

Our shears rotate 360 degrees for rapid repositioning for more efficient metal reduction. To improve our cutting force, the lower jaw is straight and the upper jaw features an apex design. We've even armed our shears with weld-on wear plates to protect them from scrap metals.

Specifications

Attachme Model	Attachment Machine Mod Model			Force a	at Throat	Jav	v Opening	
				kN	(Sh Ton)	mm	(in)	
S305	2	36D-299D2 XH	ΗP	1812	(204)	240	(9.4)	
Skid Ste	er, Multi	Terrain and (Compact 1	Frack Lo	aders			
216B3	236D	246D	259D		272D2 XHP	287D	297D2 XH	ΗP
226D	239D	249D	262D		277D	289D	299D2	
232D	242D	257D	272D	2	279D	297D2	299D2 XH	ΗP

Powering through the bunkers.

Featuring high tensile strength teeth positioned in a helical pattern, our silage defacers free and work loose compacted silage bunkers without damaging or cutting the material. They're also equipped with dual in-board hydraulic motors for stall-free operation and peak torque to power through the densest of silage bunks.

Attachmen Models	it Maa Moo	chine Iels	Overall	Width	Weight		Flow range	
			mm	(in)	kg	(lb)	L/min	(GPM)
DFS118	All b	elow	1841	72.5	425	937	75-90	20-23
DFS121	All b	elow	5146	84.5	477	1052	75-90	20-23
DFS124	All b	elow	2451	96.5	503	1109	75-90	20-23
Skid Stee	r, Multi T	errain and	l Compact	Track Lo	oaders			
216B3	236D	246D	2591	D	272D2 XHP	287D	29	7D2 XHP
226D	239D	249D	2621		277D	289D		9D2
232D	242D	257D	272[02	279D	297D2	29	9D2 XHP

SNOW BLOWERS



Quickly clear a path.

Remove snow from streets, parking lots, driveways and sidewalks. Cat snow blowers are built for wet or compacted snow. Our auger pulls snow in and our chute throws it off to the side. And our bolt-on cutting edge ensures the path you clear is clean.

Specifications

Attachment Models	Machine Models	Intake	Intake Width		Throw Distance		
		mm	(in)	m	(ft)		
SR117	216B3-232D, 239D, 249D	1702	(67)	9.1	(30)		
SR118	216B3, 236D, 242D, 246D, 257D-299D2 XHP	1854	(73)	12.2	(40)		
SR121	216B3, 236D, 242D, 246D, 257D-299D2 XHP	2159	(85)	12.2	(40)		
SR318*	All D Series	1854	(73)	13.7	(45)		
SR321*	All D Series	2159	(85)	13.7	(45)		

*Requires high flow or high flow XPS option on machine. Operates in high flow XPS on XHP machines.

Skid Steer, Multi Terrain and Compact Track Loaders

216B3	236D	246D	259D	272D2 XHP	287D	297D2 XHP
226D	239D	249D	262D	277D	289D	299D2
232D	242D	257D	272D2	279D	297D2	299D2 XHP

SNOW PLOWS



Scrape snow and ice from ground surfaces.

Windrow snow to either side of the machine or directly ahead. Our snow plows are equipped with a trip edge to clear unseen obstacles. Select from a range of widths.

Attachment Models	Mac	Machine Models		Weight			
			kg	(Ib)			
1.8 m (6 ft) Plow	All b	elow	155	(341)			
2.1 m (7 ft) Plow	All b	elow	185	(409)			
2.4 m (8 ft) Plow	All b	All below		(432)			
2.7 m (9 ft) Plow	All b	All below		(455)			
3 m (10 ft) Plow	All b	elow	216	(477)			
Skid Steer, Mu	ti Terrain and (Compact Tracl	k Loaders				
216B3 236E) 246D	259D	272D2 XHP	287D	297D2 XHP		
226D 239E) 249D	262D	277D	289D	299D2		
			279D	297D2	299D2 XHP		

STRAIGHT SNOW PUSHES



Remove snow in a single pass.

Our straight snow pushes save time and reduce the amount of salt needed. They're ideal for parking lots, driveways, airport runways and storage lots. Select from a range of widths.

Specifications

Attachme	nt Models		Machine	Models	Weight		
					kg	(Ib)	
2.4 m (8 ft)) Push Rub	ber Edge	All below	1	176	(389)	
3 m (10 ft)	Push Rub	ber Edge	All below	1	197	(434)	
3.6 m (12 f	t) Push Ru	bber Edge	All below	All below		(477)	
2.4 m (8 ft)	Push Ste	el Edge	All below	All below		(389)	
3 m (10 ft)	Push Stee	el Edge	All below	All below		(434)	
3.6 m (12 f	t) Push St	eel Edge	All below	All below		(477)	
Skid Stee	er, Multi T	errain and C	ompact Track L	oaders			
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	272D2 XHP 277D 279D	287D 289D 297D2	297D2 XHP 299D2 299D2 XHP	

STUMP GRINDERS



Make stump removal simple.

Engineered for exceptional maneuverability, Cat stump grinders are ideal for removing multiple stumps in small areas. We offer standard and high-flow models to best match your application. And our cutting wheels bear bolt-on carbide teeth for maximum wood-cutting performance and efficiency.

Attachme	Attachment Models		Machine Models			Length	Length	
				mm	(in)	mm	(in)	
SG16B		All belov	V	1175	(46)	1737	(69)	
SG18B*		All D Sei	All D Series		(46)	1737	(69)	
	U	U		nine. Operates in	high flow XP	'S on XHF	emachines.	
Skid Ste	er, Multi T	errain and (Compact Track	Loaders				
216B3	236D	246D	259D	272D2 XH	P 287D		297D2 XHP	
226D	239D	249D	262D	277D	289D		299D2	
232D	242D	257D	272D2	279D	297D2		299D2 XHP	

TILLERS

TRENCHERS





Break apart densely packed dirt.

Cat tillers feature tungsten carbine tines, each hard-faced and double-edged, to effectively churn compacted soil. Select from three settings for a range of tilling depths, depending on your application.

Specifications

Attachment Mac Models		Machine Models		Width		Working Depth		
				mm	(in)	mm	(in)	
LT13B	All	below		1788	(71)	25-152	(1-6)	
LT18B	All	D Series		2271	(90)	25-152	(1-6)	
Skid Stee	er, Multi 1	errain and C	Compact Track	Loaders				
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	272D2 XH 277D 279D	P 287D 289D 297D2		297D2 XHP 299D2 299D2 XHP	

Cut through compacted soil.

Cat trenchers were engineered to cut narrow, straight-lined trenches. Our anti-backflex chain improves attachment durability in all soil types and our grease ram makes it easy to adjust chain tension.

Attachment Models		Machine Mo	Overall V	Overall Width		Boom Length	
				mm	(in)	mm	(in)
T6B		All below		1426	(56)	914	(36)
T9B		All below		1901	(75)	1219	(48)
T15B*		All D Series		1901	(75)	1524	(60)
	5	5	S option on mach		high flow	XPS on XHI	P machines.
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	272D2 XH 277D 279D	IP 287D 289D 297D	1	297D2 XHP 299D2 299D2 XHP

VIBRATORY DRUM COMPACTORS



VIBRATORY PLATE COMPACTORS



Swiftly smooth surfaces.

Before pouring concrete or laying asphalt, smooth foundational surfaces with the Cat vibratory drum compactor. Ideal for compacting soil, sand or gravel as well as compressing asphalt patch work, our compactors are often used by general contractors and utility contractors in residential, commercial and industrial applications.

Specifications

Attachme Models	ent Ma	achine Mode	els	Drum V	/idth	Dynar	nic Force
				mm	(in)	kg	(lb)
CV16B	All	below		1676	(66)	5399	(11903)
CV18B	24	6D, 262D-299	ID2 XHP	1854	(73)	5399	(11903)
Skid Stee	er, Multi 1	errain and (Compact Tra	ck Loade	rs		
216B3 226D 232D	236D 239D 242D	246D 249D 257D	259D 262D 272D2	272 273 273	-	287D 289D 297D2	297D2 XHP 299D2 299D2 XHP

Pack with power.

Cover more ground with our vibratory plate compactor's large surface and pack soil faster with its high-power pulses. We've even built in flexible isolators to guard against excessive vibrations.

Attachme Model	ent	Machine	e Models	Impu	lse Force		Base	Plate Width
				kN	lbf	Cycles/min	mm	(in)
CVP16		All belov	v*	16	(3650)	2200	305	(12)
		errain and (– see page 5.		
	236D	246D	259D		272D2 XH	P 287D		297D2 XHP
21683	2300	2400			272D2 An			
216B3 226D	239D	249D	262D		2110	289D		299D2

WHEEL SAWS



Cut and trench tough surfaces.

Cat wheel saws can penetrate hard or compact surfaces like asphalt, reinforced concrete, rocky soil or frozen ground. They're ideal for road and utility trenching applications. Hydraulic side-shift and depth control make operating easy. And our deflector plates remove debris from the machine's path for a smooth operation.

Specifications

Attachment Models	Machine Mo	dels	Wheel Widt	h	Cutting) Depth
			mm	(in)	mm	(in)
SW345B*	239D, 246D-2	99D2 XHP	80	(3)	450	(18)
SW360B*	262D-299D2 X	KHP	80/160/200	(3/6/8)	600	(24)
SW380B*	272D-299D2 >	KHP	250	(10)	800	(32)
SW460B	272D2 XHP, 2 299D2 XHP	97D2 XHP,	80/160/200	(3/6/8)	600	(24)
SW480B	272D2 XHP, 2 299D2 XHP	97D2 XHP,	250	(10)	800	(32)
1 0	flow or high flow	·		s in high flow)	(PS on XHP	machines.
Skia Steer, iv	lulti Terrain an	d Compact Ira	CK LOADERS			
	6D 246D	259D	272D2			297D2 XHP
	9D 249D 2D 257D	262D 272D2	277D 279D	289D 297D2		299D2 299D2 XHP

WORK WITHOUT WORRY.

We back our attachments with a one-year warranty and ongoing Cat dealer support. It's another way we're helping protect what you rely on.



QUICK REFERENCE

Find attachments made for your work.

	Augers	Backhoes	Bale Spears	Bale Grabs	Blades	Brooms	Brushcu	ters	Buckets	Cold Planers	Forks	Hammers		terial ing Arms	Mulcher	rs Rake:
Site Prep and Demolition		х			х		х		х		х	х		х	х	х
Concrete Prep and Flatwork									х	х	х			х		
Material Handling			х	х					х		х			х		
Excavation and Earth Moving	х	х			х				х							
Trenching and Utilities	х	х							х		х			х		
Finishing and Site Clean-Up						х	х		х		х	х		х	х	х
Snow Removal									v							
	I		1 1	I		х			х			I	l	I		I
	Shears	Silage Defacers	Snow Blowers	Snow Plows		x ht Snow ishes	Stun Grind		× Tillers	Trenc	hers	Vibratory D Compacto		Vibratory Compac		Wheel Saw
	Shears X	Silage Defacers				ht Snow				Trenc	hers					Wheel Saw
Site Prep and Demolition		Silage Defacers				ht Snow	Grind		Tillers	Trenc	hers					Wheel Saw
Site Prep and Demolition		Silage Defacers x				ht Snow	Grind		Tillers	Trenc	hers	Compacto		Compac		
Site Prep and Demolition Concrete Prep and Flatwork		Defacers				ht Snow	Grind		Tillers	Trenc	hers	Compacto		Compac		
Site Prep and Demolition Concrete Prep and Flatwork Material Handling		Defacers				ht Snow	Grind		Tillers x	Trenc		Compacto		Compac		
Site Prep and Demolition Concrete Prep and Flatwork Material Handling Excavation and Earth Moving		Defacers				ht Snow	Grind		Tillers x			Compacto x		Compac		X

Find attachments made for your machine.

		Augers		Bacl	choes	Bales	Spears	Bale	Grabs	Bla	des			Broon	ns	
Machine Models	A14B	A19B	A26B	BH150	BH160	Single Tine	Dual Tine	1803 mm (71 in)	2133 mm (84 in)	Angle	Dozer	BA118C Angle	BP115C Pickup	BP118C Pickup	BU115 Utility	BU118 Utility
216B3	х	х		х		х	х	х	х	х	х	х	х		х	
226D	х	х	х	х		х	х	х	х	х	х	х	х		х	
232D	х	х	х	х		х	х	х	х	х	х	х	х		х	
236D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
239D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
242D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
246D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
249D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
257D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
259D	х	х	х	х		х	х	х	х	х	х	х	х	х	х	х
262D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
272D2	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
272D2 XHP	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
277D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
279D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
287D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
289D	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	Х
297D2	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
297D2 XHP	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	Х
299D2	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
299D2 XHP	Х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х

		Bru	Ishcutt	ers					Bucl	cets							C	old Planer	'S					F	orks	
Machine Models	BR160	BR166	BR172	BR272	BR378	Dirt	General Purpose	Light Material	Material Handling	Multi- Purpose	Utility	Industrial Grapple	Utility Grapple	PC104B	PC205B	PC305B	PC306B	PC306B XD	PC310B	PC310B XD	PC408B	PC412B	Pallet	Utility	Utility Grapple	Industrial Grapple
216B3	х	х	х			х	х	х	х	х	х	х	х	х	х								х	х	х	х
226D	х			х		х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
232D	х			х		х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
236D		х	х			х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
239D	х			х		х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
242D		х	х			х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
246D		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х		х				х	х	х	х
249D	х			х		х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	х
257D		х	х			Х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	Х
259D		х	х			Х	х	х	х	х	х	х	х	х	х	х	х						х	х	х	Х
262D		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х		х				х	х	х	х
272D2		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х				х	х	х	х
272D2 XHP		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х		х	х	х	х	х	х
277D		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х				х	х	х	х
279D		х	х		х	х	х	х	х	Х	х	х	х	х	х	х	х	х	х				х	х	х	х
287D		х	х		х	х	х	х	х	Х	х	х	х	х	х	х	х	х	х	х			х	х	х	х
289D		х	х		х	х	х	х	х	Х	х	х	х	х	х	х	х	х	х	х			х	х	х	х
297D2		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х			х	х	х	Х
297D2 XHP		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	Х
299D2		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х			х	х	х	Х
299D2 XHP		х	х		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	Х	х	х	х	х	х	х

	Ham	mers	Material Handling Arms			Mulo	hers					Ra	kes			Shears	Sila	age Defa	cers
Machine Models	H55E*/ H55Es	H65E*/ H65Es	Fixed Length	HM112C	HM115C	HM215C	HM315C	HM415C	HM418C	Industrial Grapple	Landscape LR15B	Landscape LR18B	Power Box PR172	Power Box PR184	Power Box PR190	S305	DFS118	DFS121	DFS12
216B3	х	х	х	x						х	х		х	х	х		х	х	х
226D	х	х	x	x		х				х	х		х	х	x		х	х	х
232D	х	х	x	х		х				х	х		х	х	х		х	х	х
236D	х	х	x		х	x				x	х		х	х	x	х	х	х	х
239D	х	х	x	x		х				х	x	х	х	х	x	х	х	х	х
242D	х	х	x		х	х				х	х		х	х	х	х	х	х	х
246D	х	х	x		х		x			х	x	х	х	х	x	х	х	х	х
249D	х	х	x	х		х				х	х	х	х	х	х	х	х	х	х
257D	х	х	x		х	x				x	x	х	х	х	x	х	х	х	х
259D	х	х	x		х	x				x	х	х	x	х	x	х	х	х	х
262D	х	х	x		х		х			х	х	х	х	х	х	х	х	х	х
272D2	х	х	x		х		x			x	х	х	х	х	x	х	х	х	х
272D2 XHP	х	х	х		х		х	x	х	х	х	х	х	х	х	х	х	х	х
277D	х	х	x		х		x			х	x	х	х	х	x	х	х	х	х
279D	х	х	х		х		х			х	х	х	х	х	х	х	х	х	х
287D	х	х	х		х		x			х	х	х	х	х	х	х	х	х	х
289D	х	х	х		х		х			х	х	х	х	х	х	х	х	х	х
297D2	х	х	x		х		х			x	x	х	x	х	х	х	х	х	х
297D2 XHP	х	х	х		х		х	х	х	х	х	х	х	х	х	х	х	х	х
299D2	х	х	x		х		х			x	х	x	x	x	х	х	х	х	х
299D2 XHP	х	х	x		х		х	x	х	х	х	х	х	х	х	х	х	х	х

*Flat top and pin-on models available


		Sno	ow Blov	vers			9	Snow Plow	S			S	traight Snow	Pushes			Stu Grin		Til	lers
Machine Models	SR117	SR118	SR121	SR318	SR321	1.8 m (6 ft) Plow	2.1 m (7 ft) Plow	2.4 m (8 ft) Plow	2.7 m (9 ft) Plow	3 m (10 ft) Plow	2.4 m (8 ft) Push Rubber Edge	3 m (10 ft) Push Rubber Edge	3.6 m (12 ft) Push Rubber Edge	2.4 m (8 ft) Push Steel Edge		3.6 m (12 ft) Push Steel Edge	SG16B	SG18B	LT13B	LT18B
216B3	х	х	х			х	х	х	х	х	х	х	х	х	х	х	х		х	
226D	х			х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
232D	х			х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
236D		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
239D	х			х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
242D		х	х	х	х	х	х	х	х	х	Х	х	х	х	х	х	х	х	х	х
246D		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х
249D	х			х	х	х	х	х	х	х	Х	х	х	х	х	х	х	х	х	х
257D		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
259D		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
262D		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
272D2		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
272D2 XHP		х	х	х	х	х	х	х	х	х	х	Х	х	х	х	х	х	х	х	х
277D		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
279D		х	х	х	х	х	х	х	х	х	Х	Х	Х	х	х	х	х	х	х	х
287D		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
289D		х	х	х	х	х	х	х	х	х	Х	Х	Х	х	х	х	х	х	х	х
297D2		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
297D2 XHP		х	х	х	х	х	х	х	х	х	х	Х	х	х	х	х	х	х	х	х
299D2		х	х	х	х	х	х	х	х	х	Х	Х	х	х	х	х	х	х	х	х
299D2 XHP		х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х	х

		Trenchers			ory Drum actors	Vibratory Plate Compactors*			Wheel Saws		
Machine Models	T6B	T9B	T15B	CV16B	CV18B	CVP16	SW345B	SW360B	SW380B	SW460B	SW480
216B3	х	х		х		х					
226D	х	х	х	х		х					
232D	х	х	х	х		х					
236D	х	х	х	х		х					
239D	х	х	х	х		х	х				
242D	х	х	х	х		х					
246D	х	х	х	х	х	х	х				
249D	х	х	х	х		х	х				
257D	х	х	х	х		х	х				
259D	х	х	х	х		х	х				
262D	х	х	х	х	х	х	х	х			
272D2	х	х	х	х	х	х	х	х	х		
272D2 XHP	х	х	х	х	х	х	х	х	х	х	х
277D	х	х	х	х	х	х	х	х	х		
279D	х	х	х	х	х	x	х	х	х		
287D	х	х	х	х	х	х	х	х	х		
289D	х	х	х	х	х	х	x	х	х		
297D2	х	х	х	х	х	х	х	х	x		
297D2 XHP	х	х	х	х	х	x	x	х	х	х	х
299D2	х	х	х	х	х	х	х	х	х		
299D2 XHP	х	х	х	х	х	х	х	х	х	х	х

*Compatible with BH150 and BH160 backhoe arm attachments – see page 5.

>> AN ENTIRE FLEET IN ONE MACHINE.

With Cat[®] attachments, your single skid steer loader can tackle all phases of your construction project, from site prep to site clean-up. Our attachments are engineered, balanced and tested to protect and enhance your Cat equipment. Browse the attachment lineup and find an entire fleet within one machine.

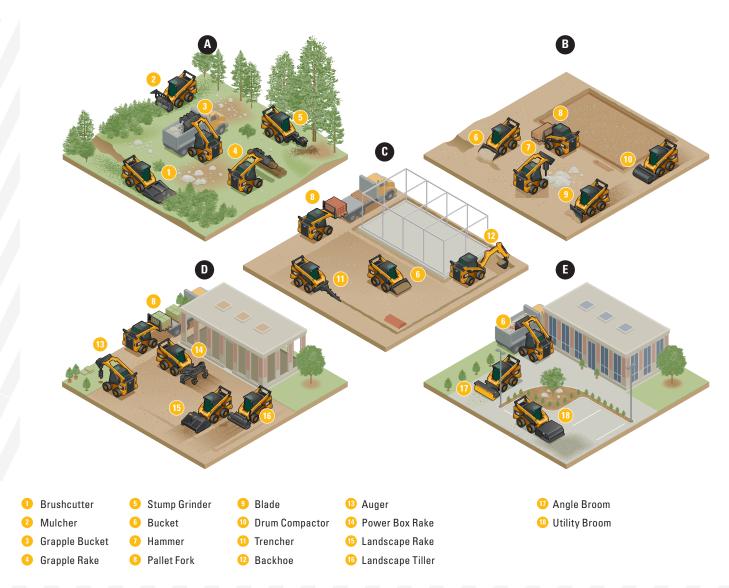

A Site Prep

Change attachments and equip your skid steer loader to mow, mulch, move material and even grind stumps.

B Flatwork & Foundation

Give your machine the tools to smooth dirt, spread gravel fill and transport palletized cinder block.

C Structure & Utilities

Use your skid steer loader to not only move structural materials, but to also trench and dig for building utilities.

Landscape

All skid steer loader attachments swap out in minutes so you can quickly move from task to task, leveling dirt, removing rock, setting sod and planting trees.

Clean-Up & Maintenance

Choose to sweep or collect debris with specialized skid steer loader brooms, and dump scrap material with a variety of buckets.